
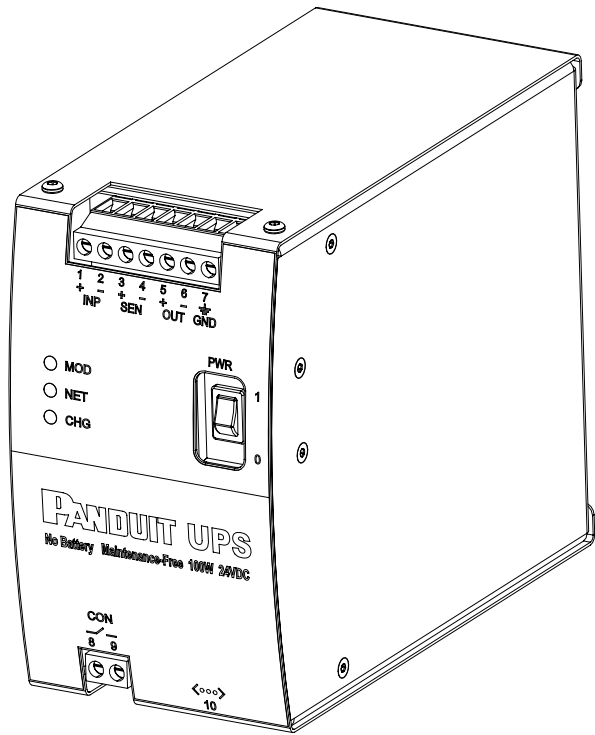


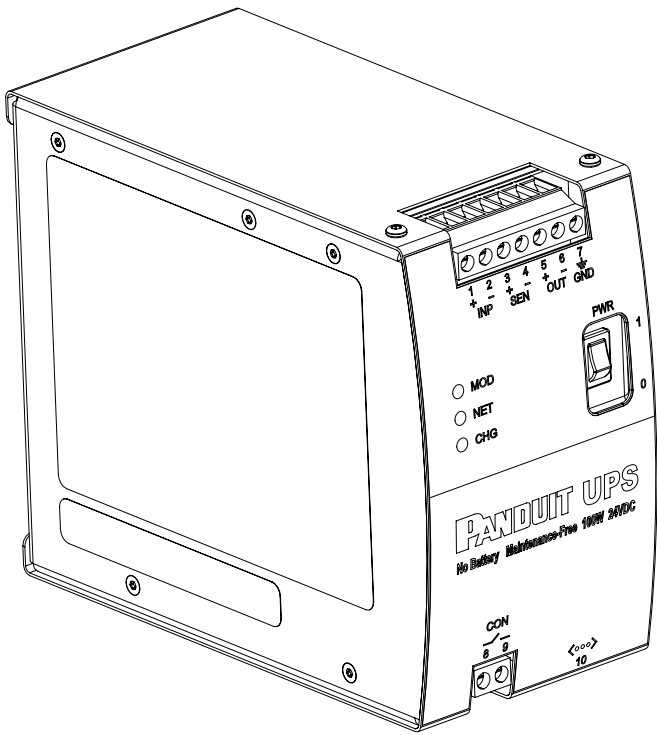

NOTES: UNLESS OTHERWISE SPECIFIED:



PANDUIT PART NO.: UPS00100DC
100W Uninterruptible Power Supply

ACCESSORIES
Load Sense Module Panduit part number UPS003LSM


UPS GENERAL SPECIFICATIONS

Input Power
Voltage: 24.0 to 28.0 VDC
Power: Fast Charge: 50 W Max.
Medium Charge: 35 W Max.
Slow Charge: 24 W Max.
Current: 6.5 A Max.
Protection: Over-voltage shut down at 32 VDC.
Maximum over-voltage is: +50 VDC at 25°C ambient
Reverse voltage maximum is: -50 VDC at 25°C ambient
Output Power
Voltage: Input present: 500 mV drop at 100 W load
Input not present: 21.0 to 23.0 VDC
Current: 4.55 A @ 22 VDC
Short circuit rating: 6.1 A to 7.7 A
Environmental
Operating Temperature: -40°C to +60°C.
Storage (non-operational) Temperature: -40°C to +70°C.
Humidity: 0 to 95% RH, noncondensing
Operational Vibration: 2G at 10 to 500 Hz
Operational Shock: 20G (11ms 3 bumps / direction, 18 bumps in total)

Weight: 2177 gr. / 4.8 lbs.
Numbers shown in parentheses [] are inches.

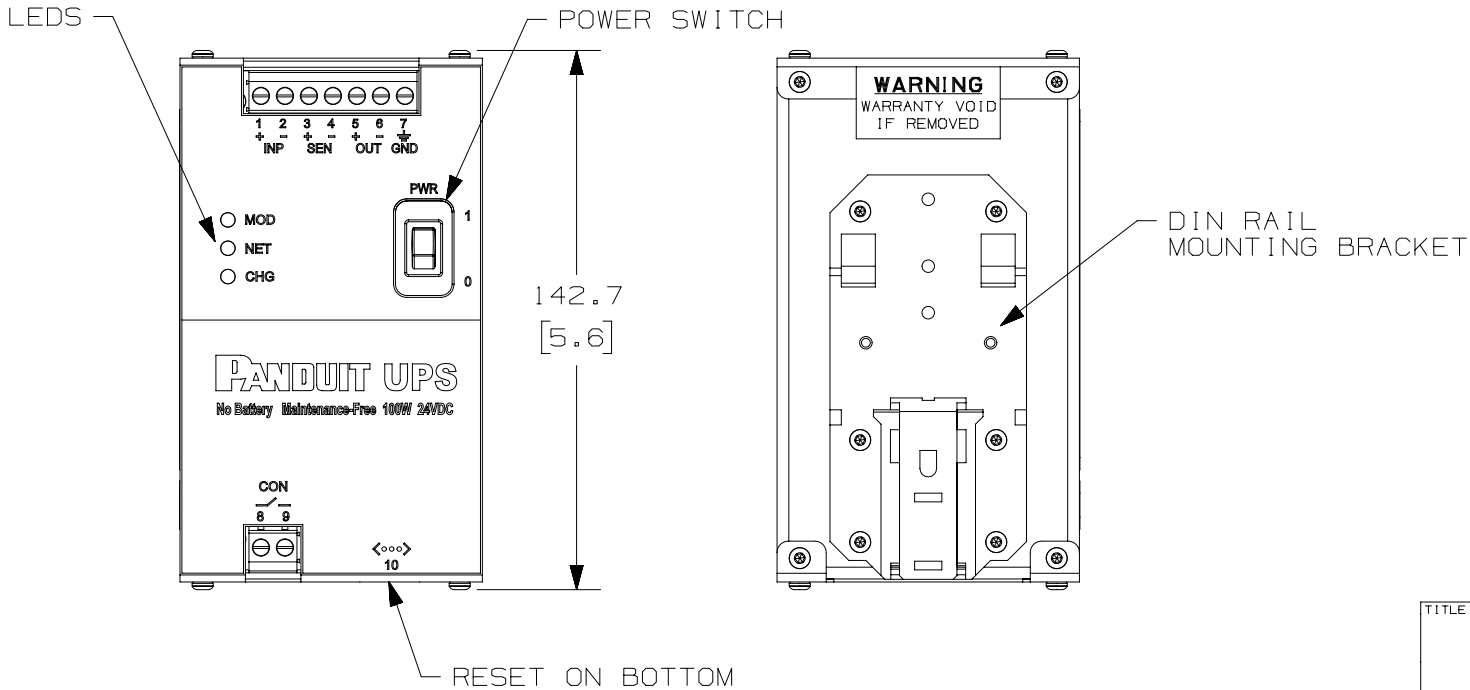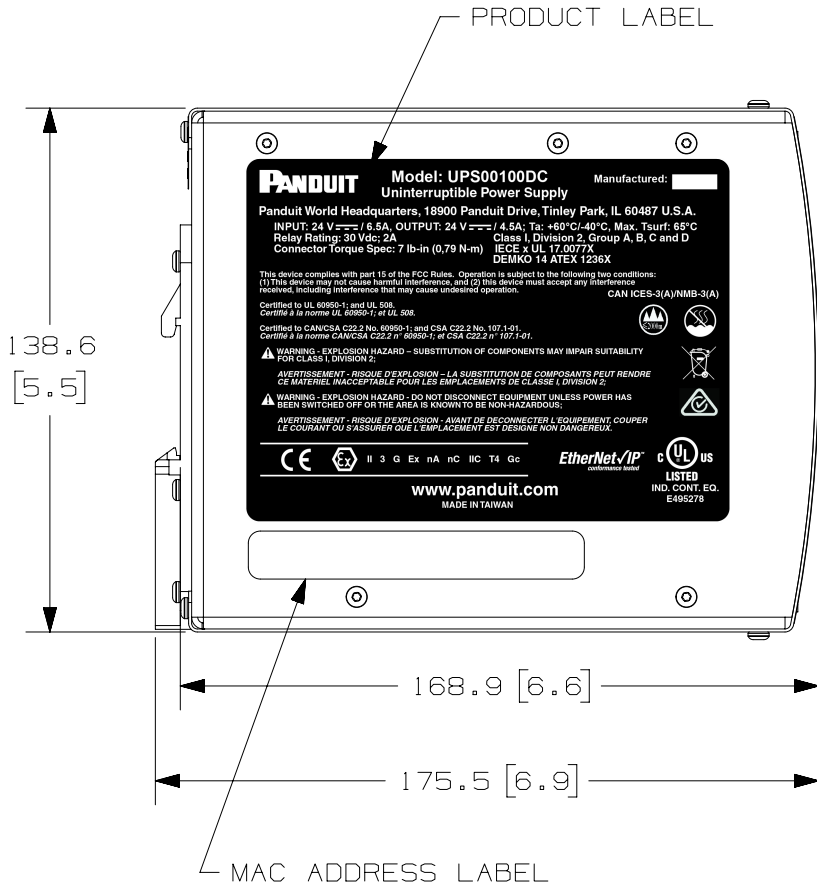

02B	1/9/18	JBO	DAJP	TIMH	RELEASED TO CUSTOMER	00074LAA_DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

TITLE					
UPS00100DC					
100W UNINTERRUPTIBLE POWER SUPPLY					
CUSTOMER DRAWING					
ITEM REVISION NAME					
00074LAA/02					
DATASET FILE NAME					
00074LAA_DC_02B					
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: mm [IN]			MATERIAL :		
.X ± - .XXX ± - .XX ± - ANGLES ± -			N/A		
			DRAWING NUMBER:		
			00074LAA_DC		
DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JBO	6/21/17	DAJP	NONE		B